


Wall mounted unit

FTXA-BS + RXA-A / RXA-B



stylish

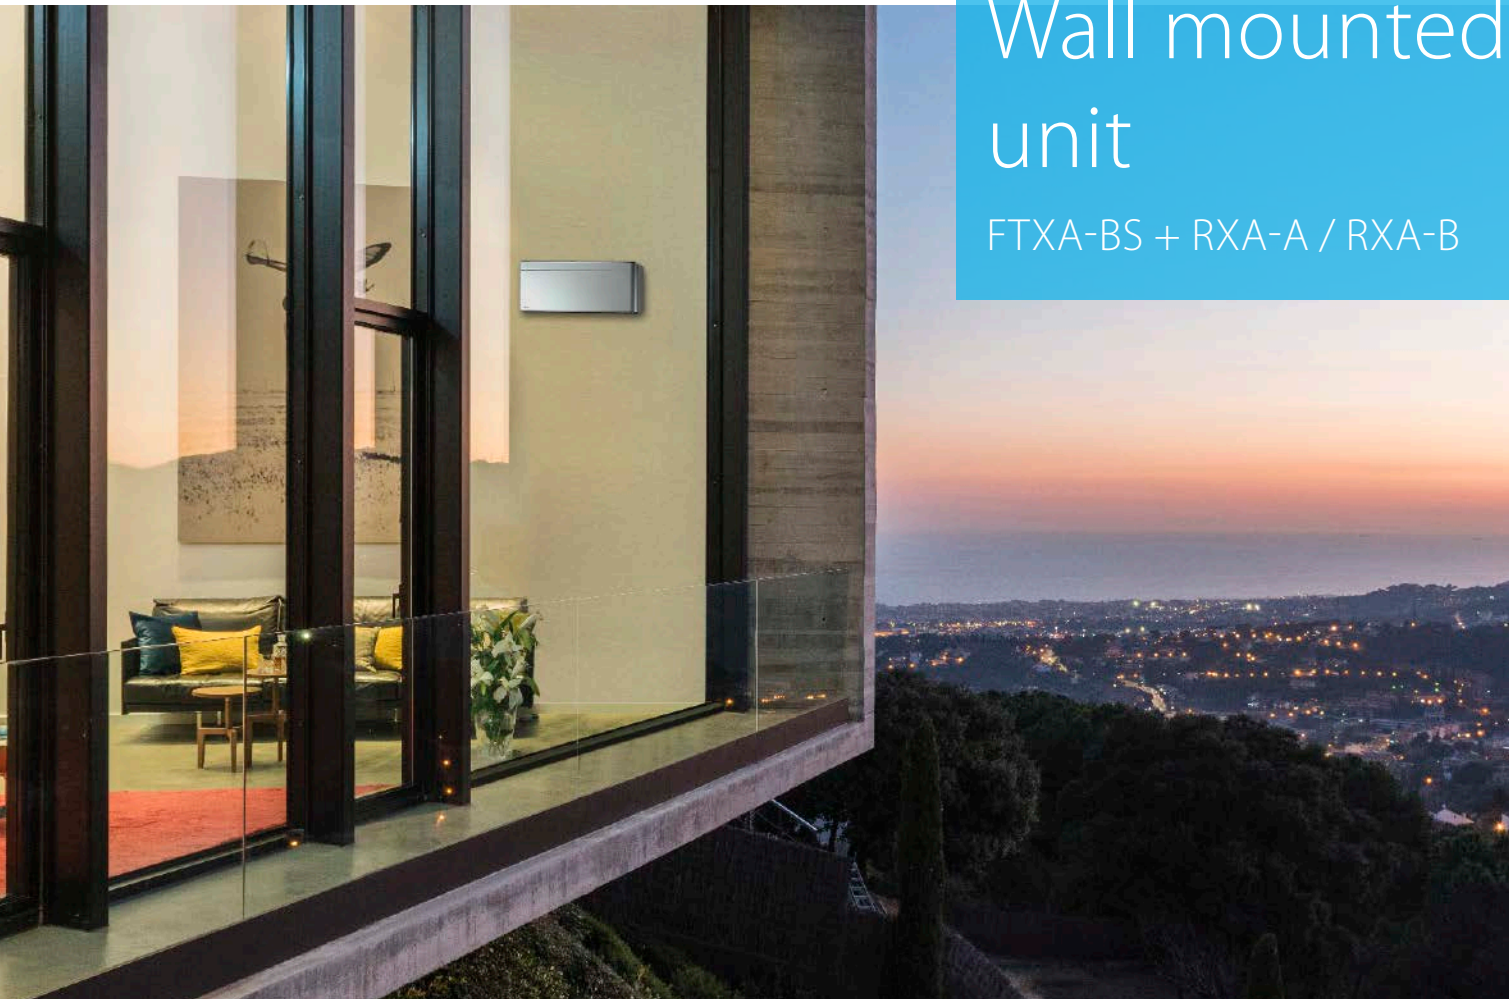

Coanda effect - cooling



Coanda effect - heating



Intelligent thermal sensor



Online controller



Multi model application

Where innovation meets creativity

- › Compact design in silver
- › Perfect temperature distribution thanks to Coanda effect
- › Intelligent thermal sensor: air flow is adjusted when detecting temperature differences
- › Online controller via app
- › Daikin Flash Streamer technology: powerful air purification
- › Practically inaudible
- › Bluevolution range: lower environmental impact
- › Seasonal efficiency values up to A+++ in cooling and heating

FTXA-BS + RXA-A / RXA-B



RXA-B

FTXA-BS

Efficiency data		FTXA + RXA	20BS + 20A	25BS + 25A	35BS + 35A	42BS + 42B	50BS + 50B	
Cooling capacity	Min./Nom./Max.	kW	1.3 /2.0 /2.6	1.3 /2.5 /3.2	1.4 /3.4 /4.0	1.70 /4.20 /5.00	1.70 /5.00 /5.30	
Heating capacity	Min./Nom./Max.	kW	1.30 /2.50 /3.50	1.30 /2.80 /4.70	1.40 /4.00 /5.20	1.70 /5.40 /6.00	1.70 /5.80 /6.50	
Power input	Cooling	Min./Nom./Max. kW	0.27 /0.43 /0.63	0.27 /0.56 /0.78	0.31 /0.78 /1.04	-1.05 /-	-1.36 /-	
	Heating	Min./Nom./Max. kW	0.25 /0.50 /0.91	0.25 /0.56 /1.22	0.26 /0.99 /1.67	-1.31 /-	-1.45 /-	
Space cooling	Energy efficiency class			A+++			A++	
	Capacity	Pdesign	kW	2.00	2.50	3.40	4.20	5.00
	SEER			8.75	8.74	8.73	7.50	7.33
	Annual energy consumption		kWh/a	80	101	137	196	239
Space heating (Average climate)	Energy efficiency class			A+++			A++	
	Capacity	Pdesign	kW	2.40	2.45	2.50	3.80	4.00
	SCOP/A				5.15		4.60	
	Annual energy consumption		kWh/a	653	666	680	1,150	1,217
Nominal efficiency	EER		4.70	4.46	4.37	3.99	3.68	
	COP			5.00	4.04	4.12	4.00	
	Annual energy consumption		kWh		-		526	679
	Energy labeling	Cooling/Heating				A/A		
Directive								

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range | See separate drawing for electrical data

Indoor unit		FTXA		20BS	25BS	35BS	42BS	50BS	
Dimensions	Unit	HeightxWidthxDepth	mm	295 x798 x189					
Weight	Unit		kg	11.5					
Air filter	Type			Removable / washable					
Fan	Air flow rate	Cooling	Silent operation/Low/Medium/High	m³/min	4.6 /6.1 /8.2 /11.0	4.6 /6.1 /8.6 /11.5	4.6 /6.1 /8.6 /11.9	4.6 /7.2 /9.8 /13.1	5.2 /7.6 /10.4 /13.5
		Heating	Silent operation/Low/Medium/High	m³/min	4.5 /6.4 /8.7 /10.9	4.5 /6.4 /9.0 /11.1	4.5 /6.4 /9.0 /11.5	5.2 /7.7 /10.5 /14.6	5.7 /8.2 /11.1 /15.1
Sound power level	Cooling		dB(A)	57			60		
Sound pressure level	Cooling	Silent operation/Low/High	dB(A)	19 /25 /39	19 /25 /40	19 /25 /41	21 /29 /45	24 /31 /46	
	Heating	Silent operation/Low/High	dB(A)	19 /25 /39	19 /25 /40	19 /25 /41	21 /29 /45	24 /33 /46	
Control systems	Infrared remote control			ARC466A58					
	Wired remote control			BRC073					

Outdoor unit		RXA/RXA		20A	25A	35A	42B	50B
Dimensions	Unit	HeightxWidthxDepth	mm	550 x765 x285			734 x870 x373	
Weight	Unit		kg	32			50	
Sound power level	Cooling		dB(A)	59			62.0	
	Heating		dB(A)	59			62.0	
Sound pressure level	Cooling	Nom.	dB(A)	46			48.0	
	Heating	Nom.	dB(A)	47			48.0	
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-10 ~46		
	Heating	Ambient	Min.~Max.	°CWB		-15 ~18		
Refrigerant	Type			R-32				
	GWP			675.0			675	
	Charge		kg/TCO2Eq	0.76 /0.52			1.10 /0.75	
Piping connections	Liquid	OD	mm	635			64	
	Gas	OD	mm	9.50			12.7	
	Piping length	OU - IU	Max. m	20			30	
	Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 10m)				
	Level difference	IU - OU	Max. m	15.0			20	
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /220-240				
Current - 50Hz	Maximum fuse amps (MFA)		A	-				

Contains fluorinated greenhouse gases | See separate drawing for operation range | See separate drawing for electrical data

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com

ECPEN20-051

02/2020



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.