

# Wall mounted unit

ATXP-K3 / ARXP-K3



*Siesta*



Energy saving during standby mode



Online controller via app




Multi model application

Discreet Siesta wall mounted unit providing high efficiency and comfort

- › Whisper quiet in operation down to 20 dBA
- › Online controller (optional): control your indoor from any location with an app, via your local network or internet and keep an overview on your energy consumption
- › Discreet, stylish front panel blends easily with the wall, and matches all interior décors
- › Seasonal efficiency values up to A++ in cooling and heating
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency

# ATXP-K3 / ARXP-K3

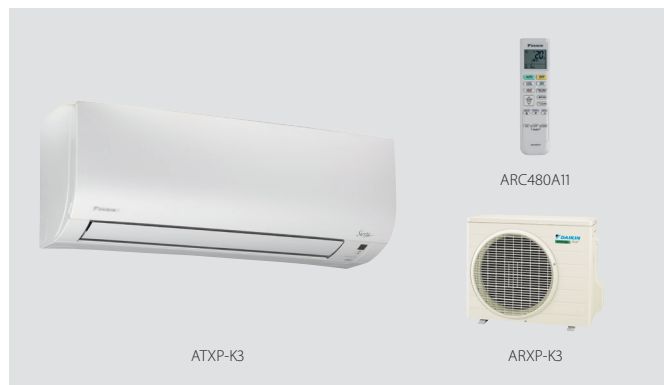

Indoor unit		ATXP	20K3	25K3	35K3
Casing	Colour		White		
Dimensions	Unit	HeightxWidthxDepth	mm		
			286x770x225		
Sound power level	Cooling		55		58
	Heating		55		58
Sound pressure level	Cooling	High/Low/Silent operation	39/25/20	40/26/20	43/27/20
	Heating	High/Low/Silent operation	39/28/21	40/28/21	40/29/21
Control systems	Infrared remote control		ARC480A11		
	Wired remote control		BRC944B2 / BRC073A1		

Cooling: T2: indoor temp. 26,6°CDB, 19,4°CWB, outdoor temp. 48°CDB [Btu/hr/W] | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | SL: The silent fan level of the air flow rate setting

Efficiency data		ATXP + ARXP	20K3 + 20K3	25K3 + 25K3	35K3 + 35K3	
Cooling capacity	Nom.	kW	2.00	2.50	3.50	
Heating capacity	Nom.	kW	2.50	3.00	4.00	
Power input	Cooling	Nom.	0.50	0.66	1.01	
	Heating	Nom.	0.52	0.69	1.00	
Seasonal efficiency (according to EN14825)	Cooling	Energy efficiency class	A++			
		Pdesign	2.00	2.50	3.50	
		SEER	6.75	6.85	6.56	
	Heating (Average climate)	Annual energy consumption	kWh	104	128	187
		Energy efficiency class		A++		
		Pdesign	kW	2.20	2.40	2.80
Nominal efficiency	EER		3.98	3.79	3.45	
		COP	4.77	4.36	4.02	
	Annual energy consumption	kWh	-			
	Energy labeling	Cooling	A			
Directive	Heating	A				

Cooling: T2: indoor temp. 26,6°CDB, 19,4°CWB, outdoor temp. 48°CDB [Btu/hr/W] | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | SL: The silent fan level of the air flow rate setting

Outdoor unit		ARXP	20K3	25K3	35K3
Dimensions	Unit	HeightxWidthxDepth	mm		
			550x765x285		
Sound power level	Cooling		60		62
	Heating		61		62
Sound pressure level	Cooling	High	46		48
	Heating	High	47		48
Operation range	Cooling	Ambient	Min.-Max. °CDB		
Refrigerant	Type/Charge/GWP		kg/TCO <sub>eq</sub>		
			R-32/0.76/0.52/675		
Power supply	Phase/Frequency/Voltage		Hz/V		
			1~/50/220-240		

Contains fluorinated greenhouse gases

**Daikin Europe N.V.** Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · [www.daikin.eu](http://www.daikin.eu) · BE 0412 120 336 · RPR Oostende (Responsible Editor)



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: [www.eurovent-certification.com](http://www.eurovent-certification.com) or using: [www.certiflash.com](http://www.certiflash.com)

ECPEN17-829

03/17



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.