


Wall mounted unit

C/FTXS-K/G



2 area intelligent eye

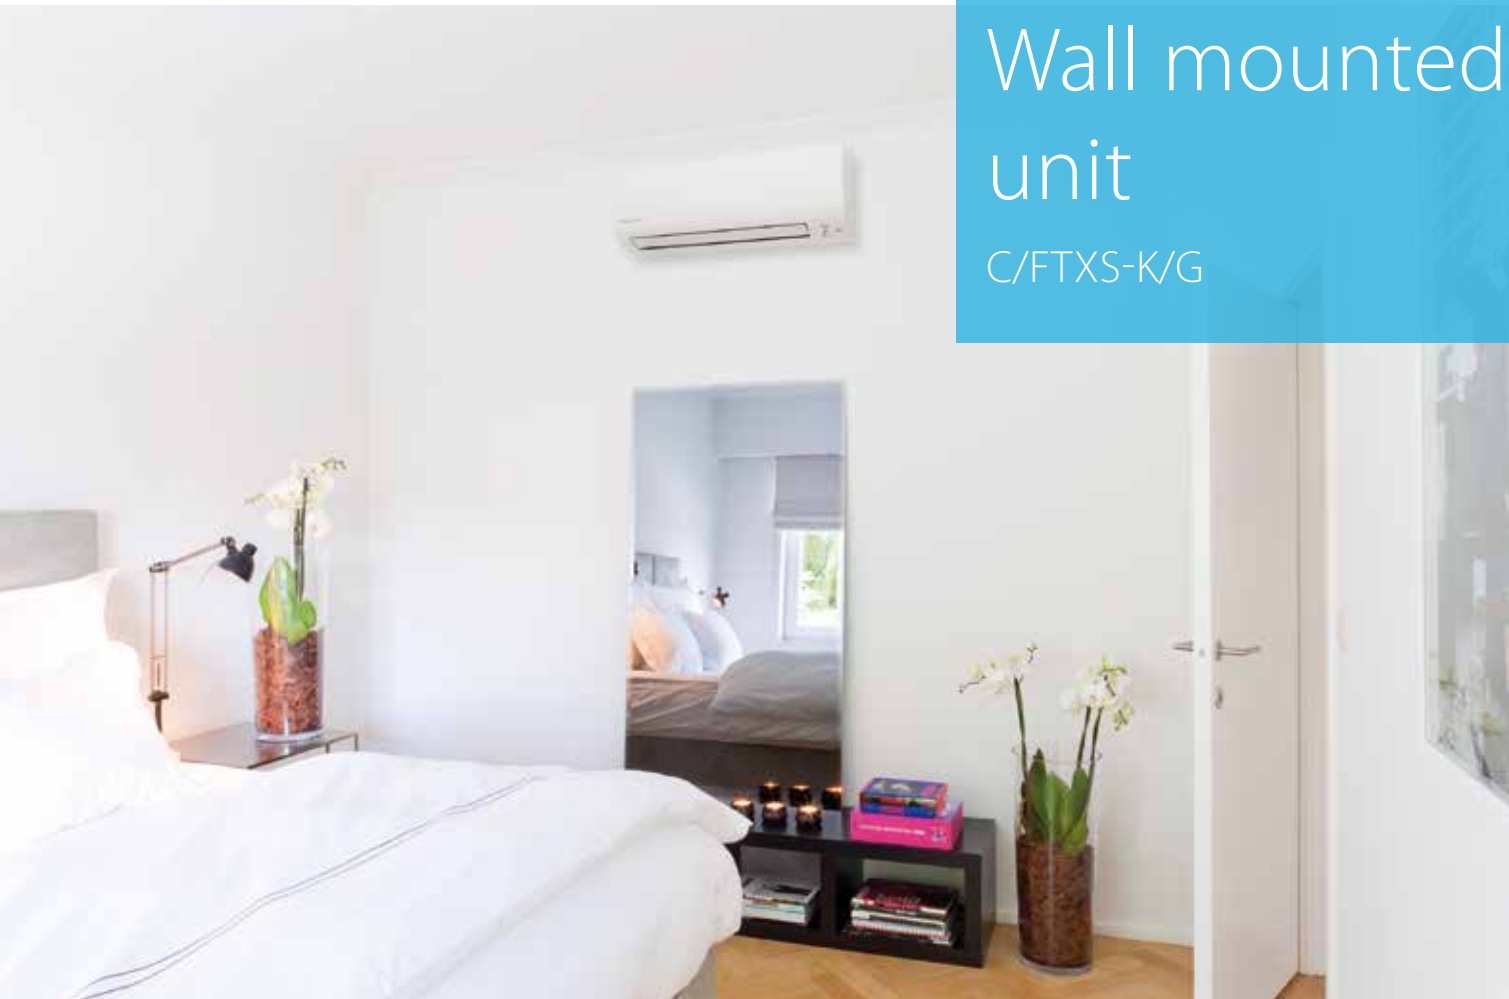

Comfort mode



3-D air flow



Online controller
via app



VRV for residential
application

Discreet, modern design for optimal efficiency and comfort thanks to 2 area intelligent eye

- › Discreet, modern design. Its smooth curve blends beautifully with the wall resulting in an unobtrusive presence that matches all interior décors.
- › High quality matt crystal white finish
- › Whisper quiet in operation: the operating of the unit can hardly be heard. The sound pressure level goes down to 19dBA!
- › Ideal for installation in bedrooms (20,25 class) and larger or irregular shaped living areas (35,42,50 class)

- › 2 area intelligent eye: air flow is sent to a zone other than where the person is located at that moment; if no people are detected, the unit will automatically switch over to the energy-efficient setting (FTXS35,42,50K)
- › Online controller (optional): control your indoor from any location with an app, via your local network or internet

C/FTXS-K/G + RXS-L(3)/F8





Indoor unit		FTXS	CTXS15K	CTXS35K	20K	25K	35K	42K	50K	60G	71G				
Casing	Colour	White													
Dimensions	Unit	HeightxWidthxDepth	289x780x215			298x900x215			290x1,050x250						
Sound power level	Cooling/Heating	dB(A)	-		58/58		59/59		60/60		60/59	63/62			
Sound pressure level	Cooling	High/Nom./Low/Silent operation	-		40/32/24/19		41/33/25/19		45/37/29/19		45/39/33/21		46/40/34/23	45/41/36/33	46/42/37/34
	Heating	High/Nom./Low/Silent operation	-		40/34/27/19		41/34/27/19		45/39/29/19		45/39/33/22		47/40/34/24		44/40/35/32
Control systems	Infrared remote control	-		ARC466A6			ARC466A9			ARC452A3					

Efficiency data		FTXS + RXS	20K + 20L	25K + 25L	35K + 35L	42K + 42L	50K + 50L	60G + 60L	71G + 71F8	
Cooling capacity	Min./Nom./Max.	kW	1.3/2.00/2.8	1.3/2.5/3.2	1.4/3.5/4.0	1.7/4.20/5.0	1.7/5.00/5.3	1.7/6.0/6.7	2.3/7.10/8.5	
Heating capacity	Min./Nom./Max.	kW	1.3/2.5/4.3	1.3/2.8/4.7	1.4/4.00/5.2	1.7/5.40/6.0	1.7/5.80/6.5	1.7/7.0/8.0	2.3/8.20/10.2	
Power input	Cooling	Min./Nom./Max.	0.320/0.430/0.760	0.320/0.570/1.000	0.350/0.860/1.190	0.320/1.253/2.330	0.350/1.506/1.810	0.440/1.990/2.400	0.570/2.350/3.200	
	Heating	Min./Nom./Max.	0.310/0.530/1.120	0.310/0.600/1.410	0.340/0.840/1.460	0.400/1.310/1.980	0.300/1.450/2.000	0.400/2.040/2.810	0.520/2.550/3.820	
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A++						A	
		Pdesign	2.00	2.50	3.50	4.20	5.00	6.00	7.10	
	SEER	7.40	7.90	7.47	6.80	5.58	5.28			
	Annual energy consumption	95	111	164	216	257	376	471		
Heating (Average climate)	Energy label	A++						A		
		Pdesign	2.30	2.50	3.60	4.00	4.60	4.80	6.20	
	SCOP	4.77	4.78	4.85	4.20	3.89	3.81			
	Annual energy consumption	675	732	1,039	1,334	1,535	1,728	2,276		
Nominal efficiency	EER	4.39	4.21	3.89	3.35	3.32	3.02			
	COP	4.72	4.67	4.76	4.12	4.00	3.43	3.22		
	Annual energy consumption	228	297	450	627	753	995	1,175		
Energy label	Cooling/Heating	A/A						B/B		B/C

Outdoor unit		RXS	20L	25L	35L	42L	50L	60L	71F8	
Dimensions	Unit	HeightxWidthxDepth	550x765x285		550x765x285	735x825x300	735x825x300	770x900x320		
Sound power level	Cooling	dB(A)	59		61	62	62	65		
	Heating	dB(A)	58		59	61	62	66		
Sound pressure level	Cooling	High/Low/Silent operation	46/-/43		48/-/44	48/44/-	49/46/-	52/-/49		
	Heating	High/Low/Silent operation	47/-/44		48/-/45	48/45/-	49/46/-	52/-/49		
Operation range	Cooling	Ambient Min.~Max.	-10~46							
	Heating	Ambient Min.~Max.	-15~18							
Refrigerant	Type/GWP	R-410A/2,0875								
	Charge	kg/TCO _{eq}	1.0/2.1	1.20/2.5	1.3/2.7	1.7/3.5	1.5/3.1	2.3/4.8		
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240			1~/50/220-230-240				

EER/COP according to Eurovent 2012, for use outside EU only | Nominal efficiency: cooling at 35°/27° nominal load, heating at 7°/20° nominal load | Contains fluorinated greenhouse gases

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECPEN15-023 03/15



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.