

# Daikin Altherma HPC

Floor standing

heat pump convector



FWXV-ATV3 series

# The Daikin Altherma HPC a fresh approach to home comfort




By providing cooling and heating, Daikin Altherma HPC is combinable with underfloor piping and can replace outdated radiators. The unit fits in bedrooms and living rooms thanks to its silent operation and elegant design.



## What is a heat pump convector

The way a heat pump convector works is similar to a radiator, as both use convection to heat a room. A radiator creates convection by running water through its pipes. With a heat pump convector, a radiator's convection process is faster because there is a small fan behind it speeding up the heating cycle.

A heat pump convector creates the same room temperature as a traditional radiator, but with lower water temperatures in the radiator, and in the long run, contribute to direct energy savings for users.

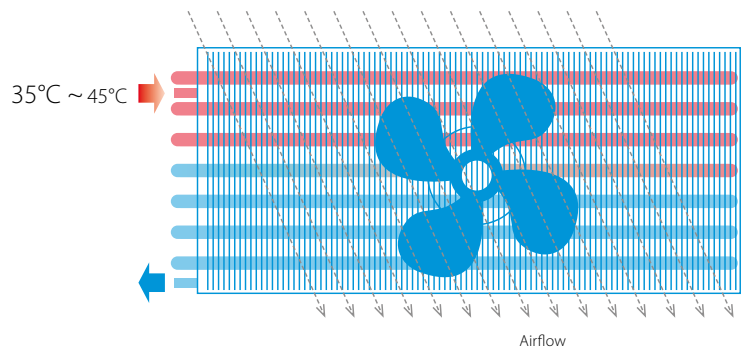


- > Optimized for new build houses
- > Can be selected at low water temperature (35°C) which makes it ideal for heat pump applications.



## Slim design

Measuring 135 mm (depth), this heat pump can fit in any house or apartment.

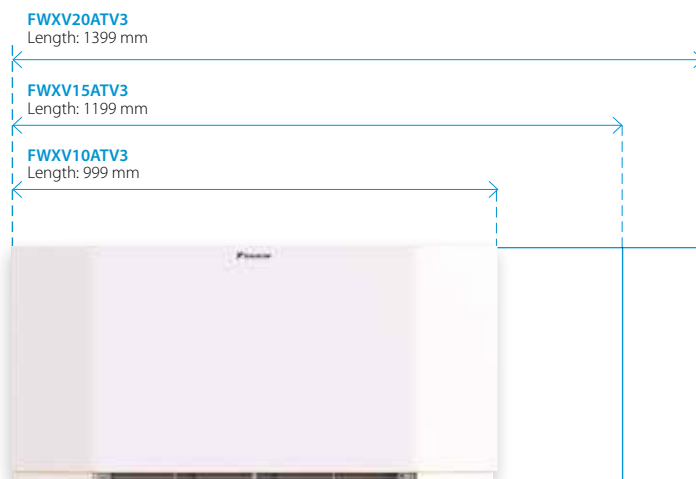

## Fast and high capacity


The Daikin Altherma HPC combines the advantages of residential underfloor heating and radiators. It delivers high capacity heating or cooling faster and can be selected at ultra-low temperatures (35/30°C regime).





## Discreet

As the unit reaches its set point, a continuous modulating fan gradually reduces its speed and creates less noise. The unit's sound pressure measures 25db(A) at 1m when the fan is on a low-speed setting.

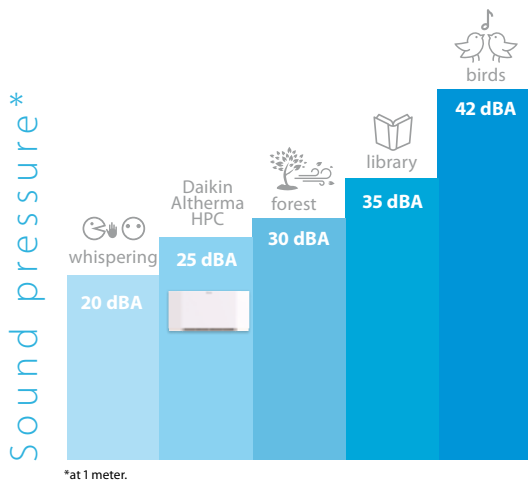

## DC Inverter

Daikin Altherma HPC uses the latest technologies to consume less electricity down to 3W of standby power input while maintaining its reliable performance.



## Controls

Daikin offers a wide variety of controllers that are functional and have a great design.

### EKRTCTRL1



- > Built-in controller
- > Fully modulating
- > Multicolor display

### EKRTCTRL2



- > Built-in controller
- > 4 speed selection

### EKWHCTRL1



- > Wall controller
- > Fully modulating
- > In combination with EKWHCTRL0

### EKPCBO




- > Built-in controller
- > ON/OFF
- > In combination with external thermostats



## Modulated airflow

When there is less heating demand, the unit modulates its airflow to slow down the fan rate, and in the process, lowers the operational sound. A standard ON/OFF fan running simultaneously at full speed can increase sound pressure.

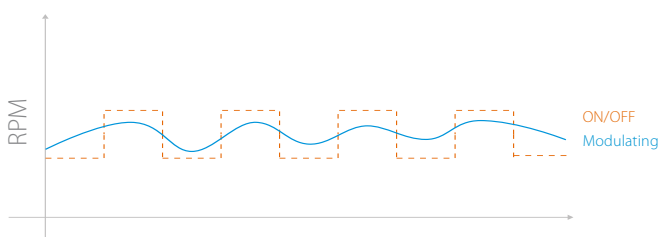

\* Only applicable for EKRTCTRL1, EKWHCTRL1




## Perfect combination

This heat pump convector fits perfectly within the Daikin Altherma 3 range.



Indoor unit				FWXV10ATV3	FWXV15ATV3	FWXV20ATV3	
Cooling capacity at 7/12°C	Min.		kW	0,66	1,30	1,82	
	Med.		kW	1,36	2,16	2,52	
	Max.		kW	1,77	2,89	3,20	
Sensible cooling capacity at 7/12°C	Min.		kW	0,39	0,99	1,22	
	Med.		kW	0,98	1,53	1,55	
	Max.		kW	1,33	2,10	1,78	
Heating capacity at 35/30°C	Min.		kW	0,41	0,45	0,93	
	Med.		kW	0,82	1,29	1,66	
	Max.		kW	1,14	1,73	2,15	
Heating capacity at 45/40°C	Min.		kW	0,95	1,26	1,90	
	Med.		kW	1,63	2,33	3,05	
	Max.		kW	2,18	3,11	3,88	
Power input	Min.		kW	0,003	0,004	0,005	
	Med.		kW	0,018	0,020	0,027	
	Max.		kW	0,018	0,020	0,027	
Fan speed	Min.		m³/h	118	180	246	
	Med.		m³/h	210	318	410	
	Max.		m³/h	294	438	566	
Casing	Colour	RAL 9003					
	Material	Metal sheet					
Dimensions	Unit	Height	mm	601			
		Width	mm	999	1199	1399	
		Depth	mm	135	135	135	
	Packed unit	Height	mm	690			
		Width	mm	1230	1430	1630	
		Depth	mm	210			
Weight	Unit	kg	20	23	26		
	Packed unit	kg	21	24	27		
Packing	Material	Carton					
	Weight	kg	1				
Heat exchanger	Quantity	1					
	Internal coil volume		l	0,8	1,13	1,46	
		Max Operating pressure	bar	10			
Water circuit	Piping connections diameter	inch	3/4" male				
	Piping material	EUROKONUS					
	Heating - Water pressure drop at 35/30°C	Min.	kPa	0,3	2,0	1,2	
		Med.	kPa	1,3	7,5	4,0	
		Max.	kPa	2,4	12,3	8,0	
	Heating - Water pressure drop at 45/40°C	Min.	kPa	1,3	8,6	3,8	
		Med.	kPa	4,2	3,3	11,2	
		Max.	kPa	7,2	11,5	21,3	
	Cooling - Water pressure drop at 7/12°C	Min.	kPa	1,2	4,3	2,1	
		Med.	kPa	2,8	19,3	13,1	
		Max.	kPa	2,9	27,0	24,0	
	Heating - Water flow rate at 35/30°C	Min.	kg/h	69,9	73,6	160,2	
		Med.	kg/h	141,4	221,1	285,3	
		Max.	kg/h	195,2	297,2	369,9	
	Heating - Water flow rate at 45/40°C	Min.	kg/h	163,5	212,5	327,0	
		Med.	kg/h	280,3	401,1	524,6	
		Max.	kg/h	374,1	534,5	667,5	
Cooling - Water flow rate at 7/12°C	Min.	kg/h	113,5	223,7	313,0		
	Med.	kg/h	234,1	371,7	433,6		
	Max.	kg/h	303,6	496,6	550,6		
Pressure	Heating/Max.	bar	10	10	10		
		dBa	29	31	32		
		dBa	34	35	35		
Sound power level	Super silent	dBa	51	53	55		
		dBa	20	22	23		
		dBa	25	26	26		
Sound pressure level	Super silent	dBa	42	44	45		
		Min.	°C	30			
		Max.	°C	85			
Operation range	Heating	Water side	Min.	°C	5		
			Max.	°C	20		
			Min.	°CDB	0		
	Cooling	Water side	Max.	°CDB	45		
			Min.	°C			
			Max.	°C			
Indoor installation	Ambient	Min.	°CDB				
		Max.	°CDB				
		Min.	°CDB				
Control systems	Infrared remote control			no			
		On board control		yes			
		Wired remote control		yes			
Installation place	Indoor						
Electrical specifications				FWXV10ATV3	FWXV15ATV3	FWXV20ATV3	
Power supply	Phase	1					
	Frequency	Hz	50				
IP class	IP	V					
Electrical power consumption	Max.	W	0,019	0,02	0,029		
	Standby	W	0,003	0,004	0,005		
Current	Zmax	Text	Ω	2556	2300	1643	
	Maximum running current		A	0,16	0,18	0,26	
Current - 50 Hz	Nominal running current		A	0,09	0,1	0,14	

Daikin Europe N.V. Naamloze Vennootschap Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Publisher)



ECPEN19-793 06/19



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Printed on non-chlorinated paper.